

## How to install/upgrade

### Topic in this document

[How to install/upgrade the linear plugin v1.2.....1](#)

### How to install/upgrade the linear plugin v1.2

This patch is applicable in all SC-DAD devices with analog inputs (from version v2.0 to v2.4).

**NOTE:** The installation/upgrade will need to reboot the device, the data acquisition will be stopped for 1 minute.

#### To apply the patch

- 1) Disable the linear plug-in if enabled (by selecting the raw plug-in instead of the linear plug-in from the Ai data treat panel in the Input Configuration section), reboot the device.
- 2) Click on the Tools menu button from the web configuration software (to access on the web configurator open a web browser and type: <http://xxx.xxx.xxx.xxx/> where xxx.xxx.xxx.xxx is the SC-DAD IP)




- 3) Insert the system password if asked (default password: root) and then click to the login button



- 4) Click on the Software Upgrade/Backup Restore button



5) Select the linear 1.2 file and use “send” button to start the upgrade

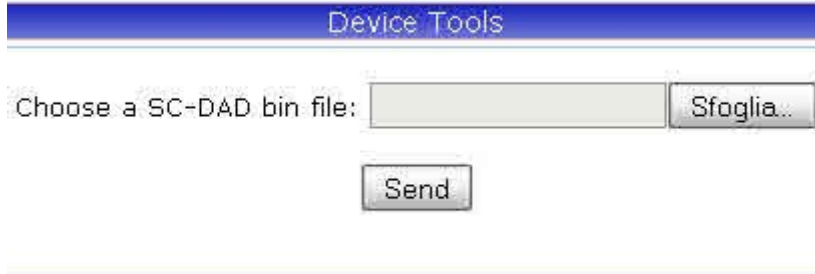

A white page will appear, then wait for the device automatic reboot (15 seconds) and then close the web page.

**NOTE:** Don't use the refresh or back button of the web browser.

Wait 30 seconds and open the web configurator again (to access on the web configurator open a web browser and type: <http://xxx.xxx.xxx.xxx/> where xxx.xxx.xxx.xxx is the SC-DAD IP) open the linear plug-in configuration page and check the version on the top of the configuration page (it should be v1.2).